


**Luminaire type**

Product reference: IL4-S-1132-830M-DAD-MP-FGED  
Article Number: 97-IL400039ED  
Product type: Surface Mount  
Mounting type: Surface  
Applications: Office, General and Retail


**Specification text**

Surface Mount luminaire from the iline 4 family. Symmetrical, Wide lighting distribution, UGR 19. Light output of 2055lm with an efficacy of 105lm/W. Light source colour temperature 3000K and CRI 85. Complete with DALI control gear and DALI test 3hr emergency. Nominal dimensions L1132 x W40 x H62mm. Finished in Grey.

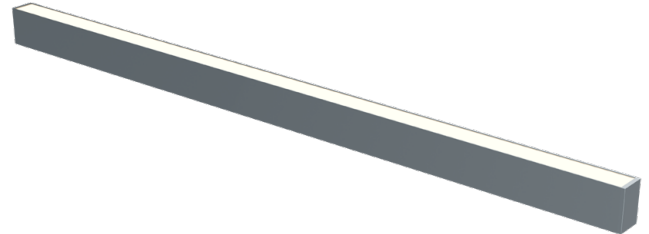

**Lighting performance**

Output lumens: 2055 lm  
Efficacy: 105 lm/W  
Rated power: 19.5 W  
Control gear: DALI  
Dimming range: 1-100%  
DC Suitable: Yes  
Colour temperature: 3000K K  
MacAdams < 3  
CRI: 85  
Radiation pattern: Symmetrical  
Beam angle: Wide  
Unified glare rating (U.G.R): 19

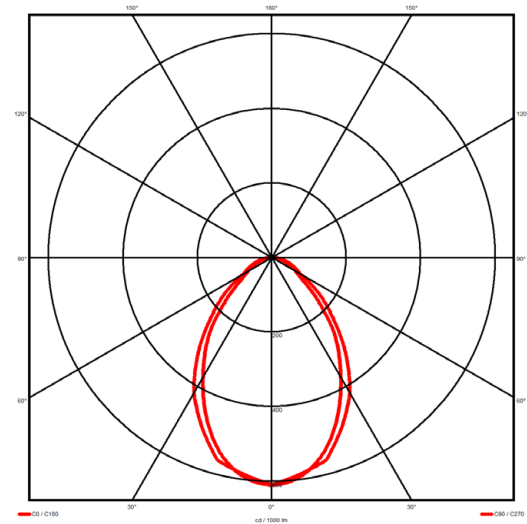

**Physical details**

Finish: Grey  
Length: 1132 mm  
Width: 40 mm  
Height: 62 mm  
IP Rating: IP20

