


Luminaire type

| | |
|--------------------|-----------------------------|
| Product reference: | IL4-S-1132-840M-DAD-MP-FGED |
| Article Number: | 97-IL400045ED |
| Product type: | Surface Mount |
| Mounting type: | Surface |
| Applications: | Office, General and Retail |

Specification text

Surface Mount luminaire from the iline 4 family. Symmetrical, Wide lighting distribution, UGR 19. Light output of 2119lm with an efficacy of 109lm/W. Light source colour temperature 4000K and CRI 85. Complete with DALI control gear and DALI test 3hr emergency. Nominal dimensions L1132 x W40 x H62mm. Finished in Grey.

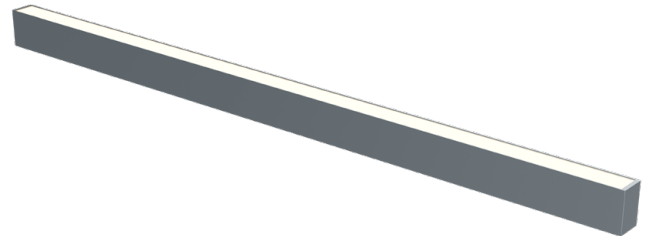

Lighting performance

| | |
|--------------------------------|-------------|
| Output lumens: | 2119 lm |
| Efficacy: | 109 lm/W |
| Rated power: | 19.5 W |
| Control gear: | DALI |
| Dimming range: | 1-100% |
| DC Suitable: | Yes |
| Colour temperature: | 4000K K |
| MacAdams | < 3 |
| CRI: | 85 |
| Radiation pattern: | Symmetrical |
| Beam angle: | Wide |
| Unified glare rating (U.G.R.): | 19 |



Physical details

| | |
|------------|---------|
| Finish: | Grey |
| Length: | 1132 mm |
| Width: | 40 mm |
| Height: | 62 mm |
| IP Rating: | IP20 |

