


### Luminaire type

|                    |                             |
|--------------------|-----------------------------|
| Product reference: | IL4-S-1132-830M-DAD-OP-FGES |
| Article Number:    | 97-IL400048ES               |
| Product type:      | Surface Mount               |
| Mounting type:     | Surface                     |
| Applications:      | Office, General and Retail  |


### Specification text

Surface Mount luminaire from the iline 4 family. Symmetrical, Wide lighting distribution, UGR 22. Light output of 2384lm with an efficacy of 122lm/W. Light source colour temperature 3000K and CRI 85. Complete with DALI control gear and self test 3hr emergency. Nominal dimensions L1132 x W40 x H62mm. Finished in Grey.

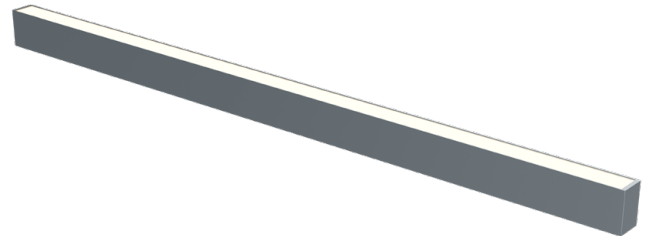

### Lighting performance

|                                |             |
|--------------------------------|-------------|
| Output lumens:                 | 2384 lm     |
| Efficacy:                      | 122 lm/W    |
| Rated power:                   | 19.5 W      |
| Control gear:                  | DALI        |
| Dimming range:                 | 1-100%      |
| DC Suitable:                   | Yes         |
| Colour temperature:            | 3000K K     |
| MacAdams                       | < 3         |
| CRI:                           | 85          |
| Radiation pattern:             | Symmetrical |
| Beam angle:                    | Wide        |
| Unified glare rating (U.G.R.): | 22          |

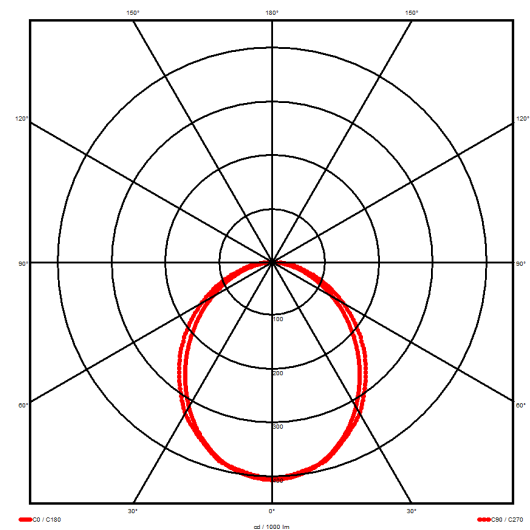

### Physical details

|            |         |
|------------|---------|
| Finish:    | Grey    |
| Length:    | 1132 mm |
| Width:     | 40 mm   |
| Height:    | 62 mm   |
| IP Rating: | IP20    |

