


### Luminaire type

Product reference:	IL4-S-1482-840M-DAD-OP-FGED
Article Number:	97-IL400254ED
Product type:	Surface Mount
Mounting type:	Surface
Applications:	Office, General and Retail

### Specification text

Surface Mount luminaire from the iline 4 family. Symmetrical, Wide lighting distribution, UGR 22. Light output of 3218lm with an efficacy of 125lm/W. Light source colour temperature 4000KK and CRI 85. Complete with DALI control gear and DALI test 3hr emergency. Nominal dimensions L1482 x W40 x H62mm. Finished in Grey.

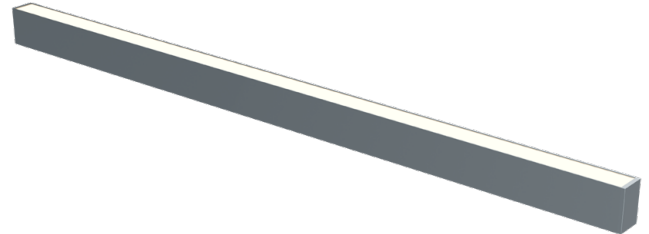

### Lighting performance

Output lumens:	3218 lm
Efficacy:	125 lm/W
Rated power:	25.7 W
Control gear:	DALI
Dimming range:	1-100%
DC Suitable:	Yes
Colour temperature:	4000K K
MacAdams	< 3
CRI:	85
Radiation pattern:	Symmetrical
Beam angle:	Wide
Unified glare rating (U.G.R):	22



### Physical details

Finish:	Grey
Length:	1482 mm
Width:	40 mm
Height:	62 mm
IP Rating:	IP20

