


### Luminaire type

|                    |                            |
|--------------------|----------------------------|
| Product reference: | IL6-R-1487-840M-DAD-MP-FGE |
| Article Number:    | 97-IL400325E               |
| Product type:      | Recessed                   |
| Mounting type:     | Recessed                   |
| Applications:      | Office, General and Retail |

### Specification text

Recessed luminaire from the iline 4 family. Symmetrical, Wide lighting distribution, UGR 19. Light output of 2774lm with an efficacy of 108lm/W. Light source colour temperature 4000KK and CRI 85. Complete with DALI control gear and manual test 3hr emergency. Nominal dimensions L1487 x W54 x H85mm. Finished in Grey.

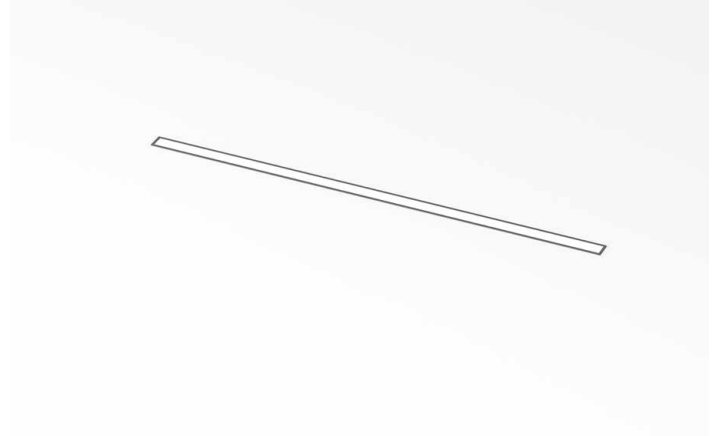

### Lighting performance

|                               |             |
|-------------------------------|-------------|
| Output lumens:                | 2774 lm     |
| Efficacy:                     | 108 lm/W    |
| Rated power:                  | 25.7 W      |
| Control gear:                 | DALI        |
| Dimming range:                | 1-100%      |
| DC Suitable:                  | Yes         |
| Colour temperature:           | 4000K K     |
| MacAdams                      | < 3         |
| CRI:                          | 85          |
| Radiation pattern:            | Symmetrical |
| Beam angle:                   | Wide        |
| Unified glare rating (U.G.R): | 19          |



### Physical details

|            |         |
|------------|---------|
| Finish:    | Grey    |
| Length:    | 1487 mm |
| Width:     | 54 mm   |
| Height:    | 85 mm   |
| IP Rating: | IP20    |

