iline 6 RIDI GROUP UK

+44 (0) 1279 450882

WWW.RIDI-GROUP.CO.UK


SALES@RIDI.CO.UK

Luminaire type

Product reference: Article Number: Product type: Mounting type: Applications: IL6-S-1478-830M-DAD-MP-FWED 97-IL600237ED Surface Mount Surface Office, General and Retail

Specification text

Surface Mount luminaire from the iline 6 family. Symmetrical, Wide lighting distribution, UGR <19. Light output of 2947.83lm with an efficacy of 113lm/W. Light source colour temperature 3000K and CRI 85. Complete with DALI control gear and DALI test 3hr emergency. Nominal dimensions L1478 x W60 x H80mm. Finished in White.

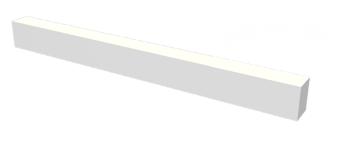


Lighting performance

	20 47 02 1
Output lumens:	2947.83 lm
Efficacy:	113 lm/W
Rated power:	23 W
Control gear:	DALI
Dimming range:	1-100%
DC Suitable:	Yes
Colour temperature:	3000 K
MacAdams	< 3
CRI:	85
Radiation pattern:	Symmetrical
Beam angle:	Wide
Unified glare rating (U.G.R):	<19

Physical details

Finish:	White
Length:	1478 mm
Width:	60 mm
Height:	80 mm
IP Rating:	IP20





lightworks

The details provided in this data sheet were prepared with due care but are still subject to error. We retain the right to make formal, technical and pricing changes. © 22/01/25 RIDI Lighting Ltd, Units 8 & 9 The Marshgate Centre, Harlow Business Park, Parkway, Harlow, Essex, CM19 5QP.

RIDI GROUP UK