

### Luminaire type

|                    |                               |
|--------------------|-------------------------------|
| Product reference: | IL6-WS-1968-840M-DADI-MP-FWED |
| Article Number:    | 97-IL600407ED                 |
| Product type:      | Pendant                       |
| Mounting type:     | Pendant                       |
| Applications:      | Office, General and Retail    |


### Specification text

Pendant luminaire from the iline 6 family. Symmetrical, Wide lighting distribution, UGR <19. Light output of 6397lm with an efficacy of 129lm/W. Light source colour temperature 4000K and CRI 85. Complete with DALI control gear and DALI test 3hr emergency. Nominal dimensions L1968 x W60 x H80mm. Finished in White.



### Lighting performance

|                                |             |
|--------------------------------|-------------|
| Output lumens:                 | 6397 lm     |
| Efficacy:                      | 129 lm/W    |
| Rated power:                   | 61.7 W      |
| Control gear:                  | DALI        |
| Dimming range:                 | 1-100%      |
| DC Suitable:                   | Yes         |
| Colour temperature:            | 4000 K      |
| MacAdams                       | < 3         |
| CRI:                           | 85          |
| Radiation pattern:             | Symmetrical |
| Beam angle:                    | Wide        |
| Unified glare rating (U.G.R.): | <19         |

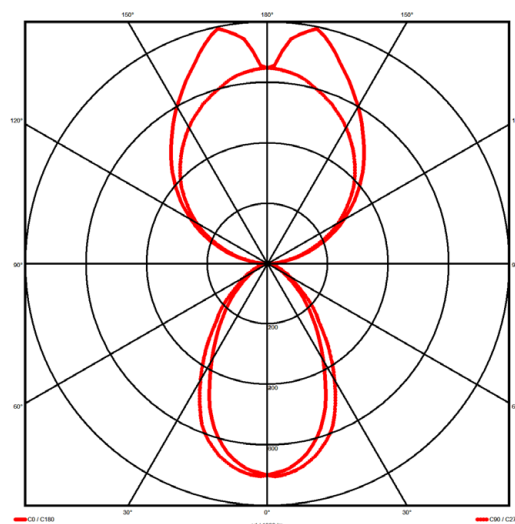

### Physical details

|            |         |
|------------|---------|
| Finish:    | White   |
| Length:    | 1968 mm |
| Width:     | 60 mm   |
| Height:    | 80 mm   |
| IP Rating: | IP20    |

