

### Luminaire type

|                    |                              |
|--------------------|------------------------------|
| Product reference: | IL6-WS-1968-830M-DADI-OP-FBE |
| Article Number:    | 97-IL600411E                 |
| Product type:      | Pendant                      |
| Mounting type:     | Pendant                      |
| Applications:      | Office, General and Retail   |


### Specification text

Pendant luminaire from the iline 6 family. Symmetrical, Wide lighting distribution, UGR <22. Light output of 6539.74lm with an efficacy of 132lm/W. Light source colour temperature 3000K and CRI 85. Complete with DALI control gear and manual test 3hr emergency. Nominal dimensions L1968 x W60 x H80mm. Finished in Black.



### Lighting performance

|                               |             |
|-------------------------------|-------------|
| Output lumens:                | 6539.74 lm  |
| Efficacy:                     | 132 lm/W    |
| Rated power:                  | 61.7 W      |
| Control gear:                 | DALI        |
| Dimming range:                | 1-100%      |
| DC Suitable:                  | Yes         |
| Colour temperature:           | 3000 K      |
| MacAdams                      | < 3         |
| CRI:                          | 85          |
| Radiation pattern:            | Symmetrical |
| Beam angle:                   | Wide        |
| Unified glare rating (U.G.R): | <22         |

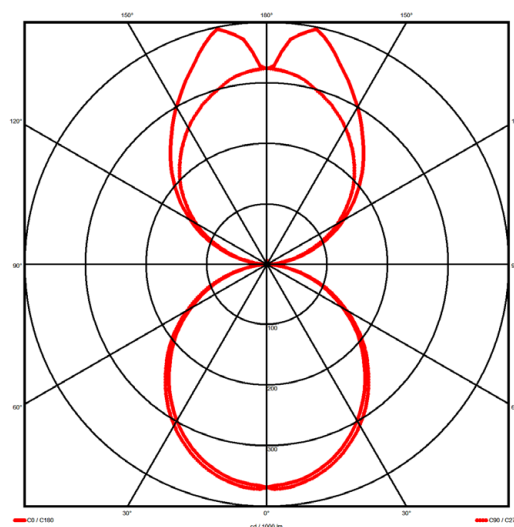

### Physical details

|            |         |
|------------|---------|
| Finish:    | Black   |
| Length:    | 1968 mm |
| Width:     | 60 mm   |
| Height:    | 80 mm   |
| IP Rating: | IP20    |

