iline 6 RIDI GROUP UK

+44 (0) 1279 450882

WWW.RIDI-GROUP.CO.UK


SALES@RIDI.CO.UK

Luminaire type

Product reference: Article Number: Product type: Mounting type: Applications: IL6-S-1968-840M-DAD-OP-FWE 97-IL600452E Surface Mount Surface Office, General and Retail

Specification text

Surface Mount luminaire from the iline 6 family. Symmetrical, Wide lighting distribution, UGR <22. Light output of 4397lm with an efficacy of 127lm/W. Light source colour temperature 4000K and CRI 85. Complete with DALI control gear and manual test 3hr emergency. Nominal dimensions L1968 x W60 x H80mm. Finished in White.

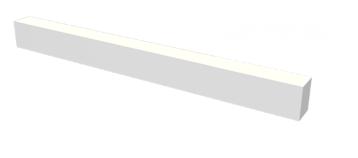


Lighting performance

4397 lm
127 lm/W
30.6 W
DALI
1-100%
Yes
4000 K
< 3
85
Symmetrical
Wide
<22

Physical details

Finish:	White
Length:	1968 mm
Width:	60 mm
Height:	80 mm
IP Rating:	IP20





lightworks

RIDI GROUP UK

The details provided in this data sheet were prepared with due care but are still subject to error. We retain the right to make formal, technical and pricing changes. © 22/01/25 RIDI Lighting Ltd, Units 8 & 9 The Marshgate Centre, Harlow Business Park, Parkway, Harlow, Essex, CM19 5QP.